

ANALOG FILTER REQUIREMENTS FOR $f_o = 10\text{MHz}$:
 $f_c = 30\text{MSPS}$ AND $f_c = 60\text{MSPS}$

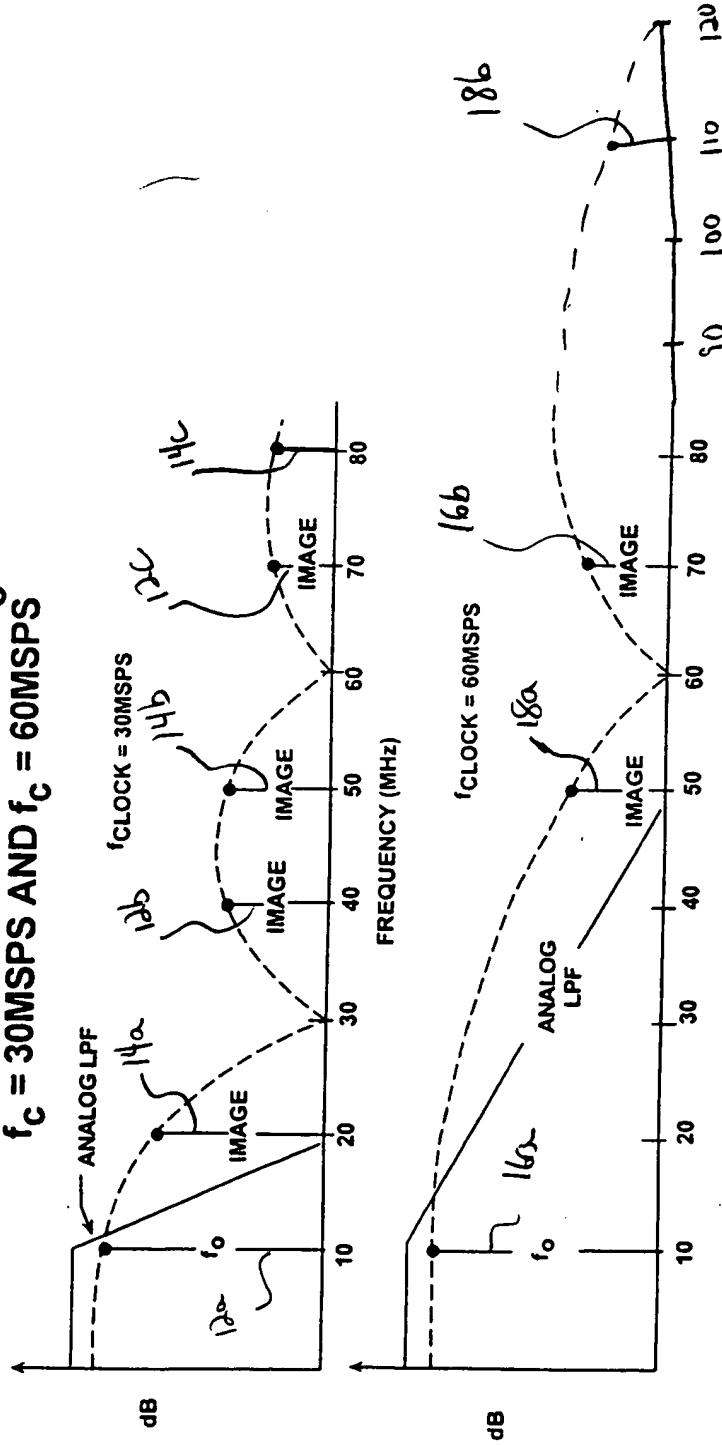


FIG. 1

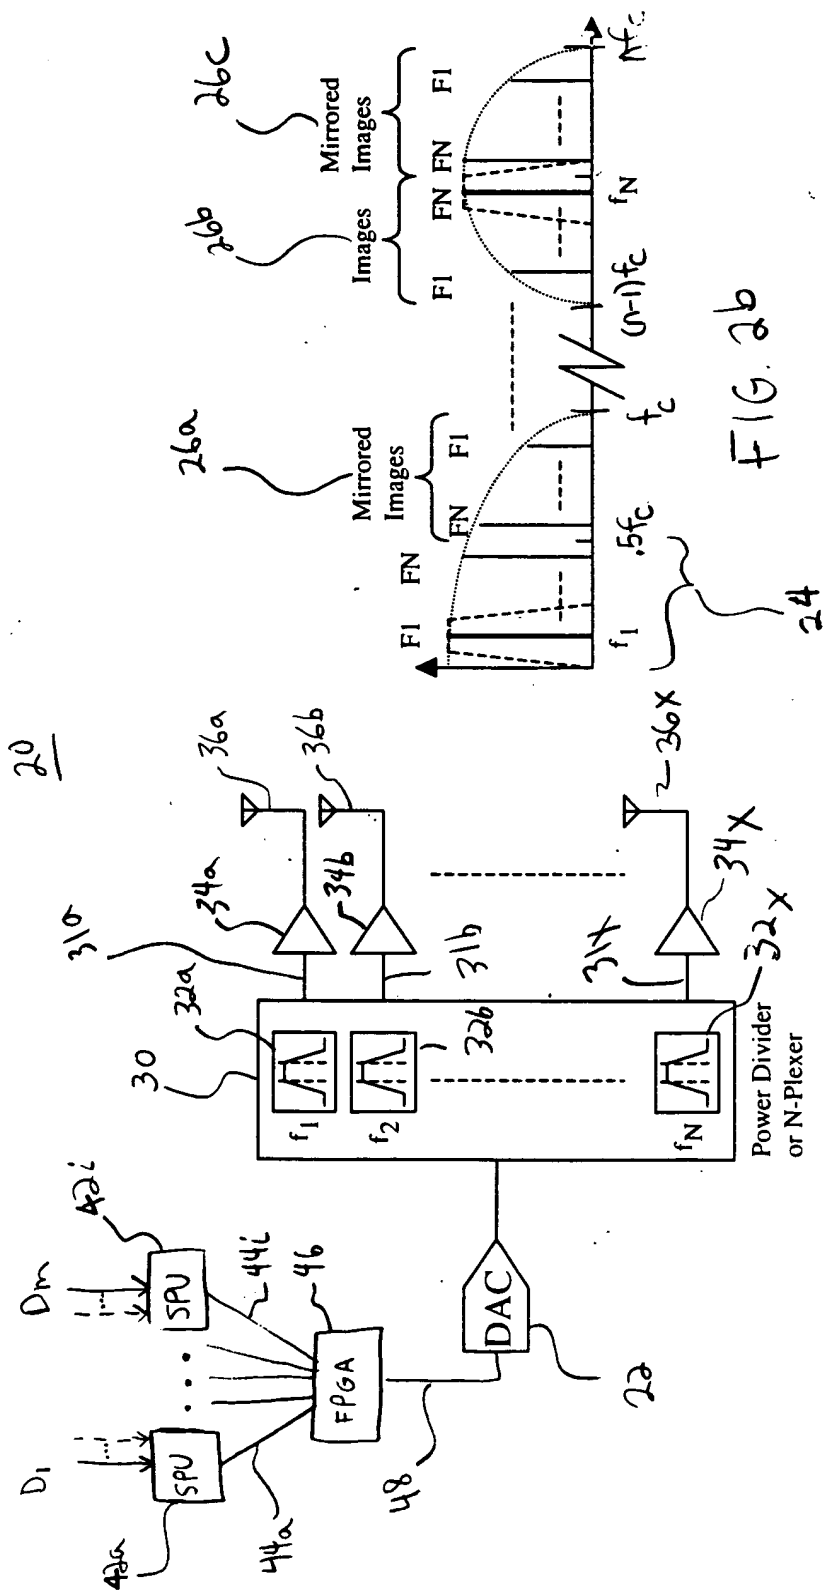


Figure 10: Digital RF Transmitter

TEST 00 04040260

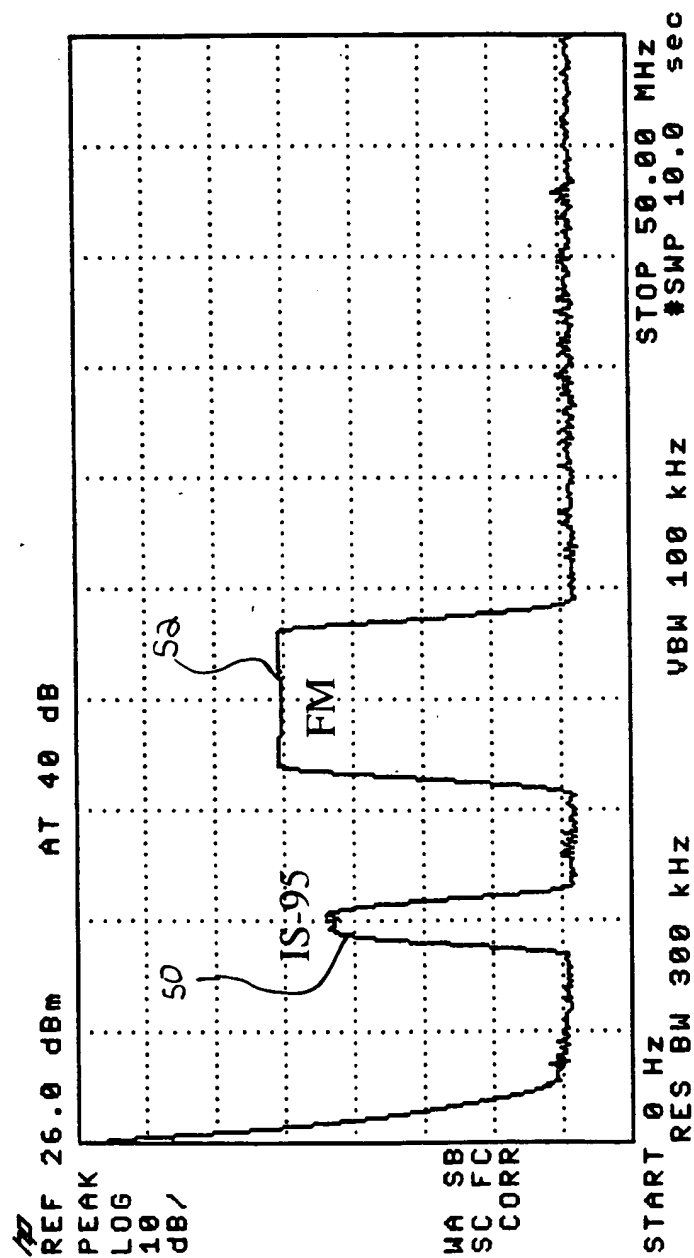


FIG. 3

POLYMER LETTERS

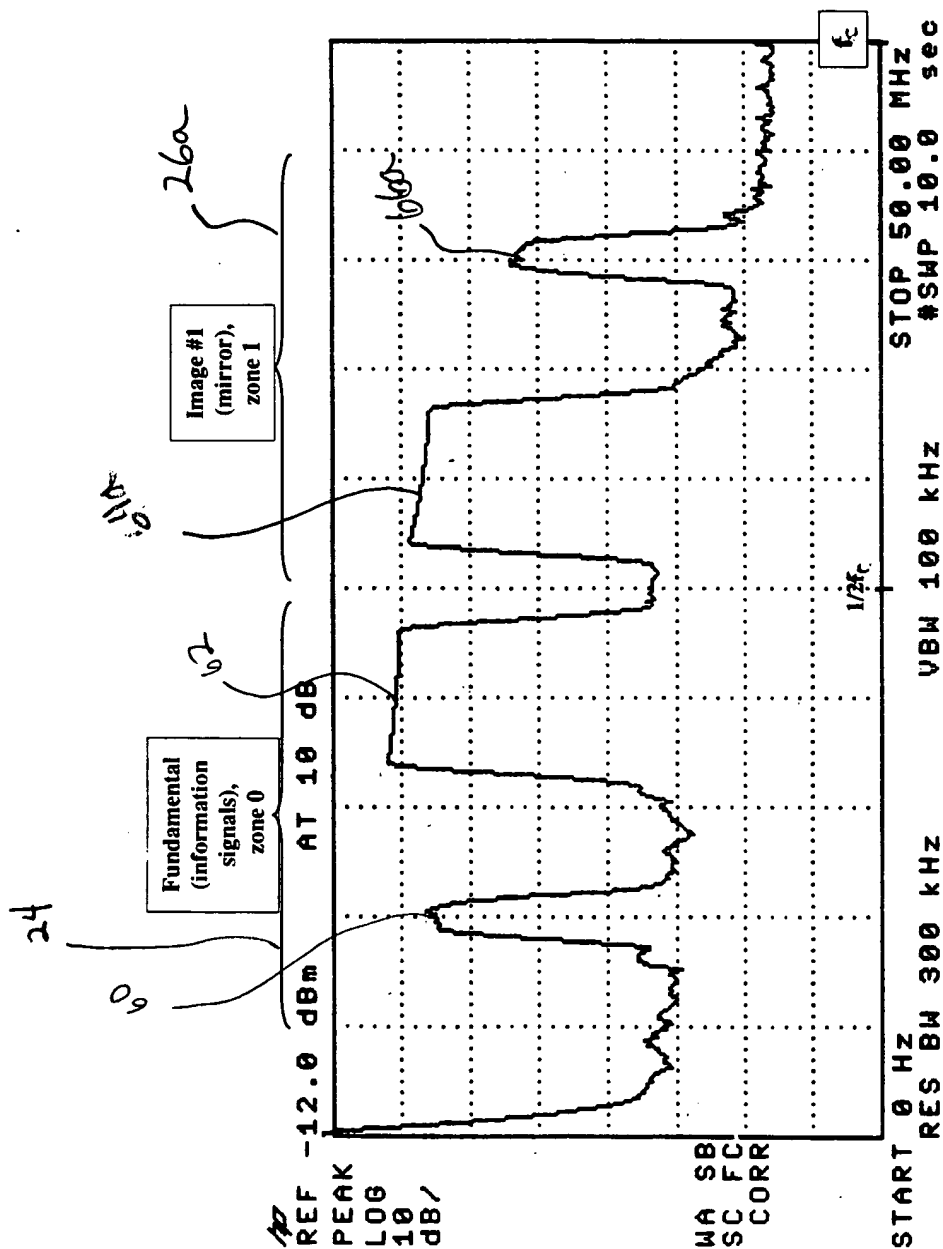


Fig. 4

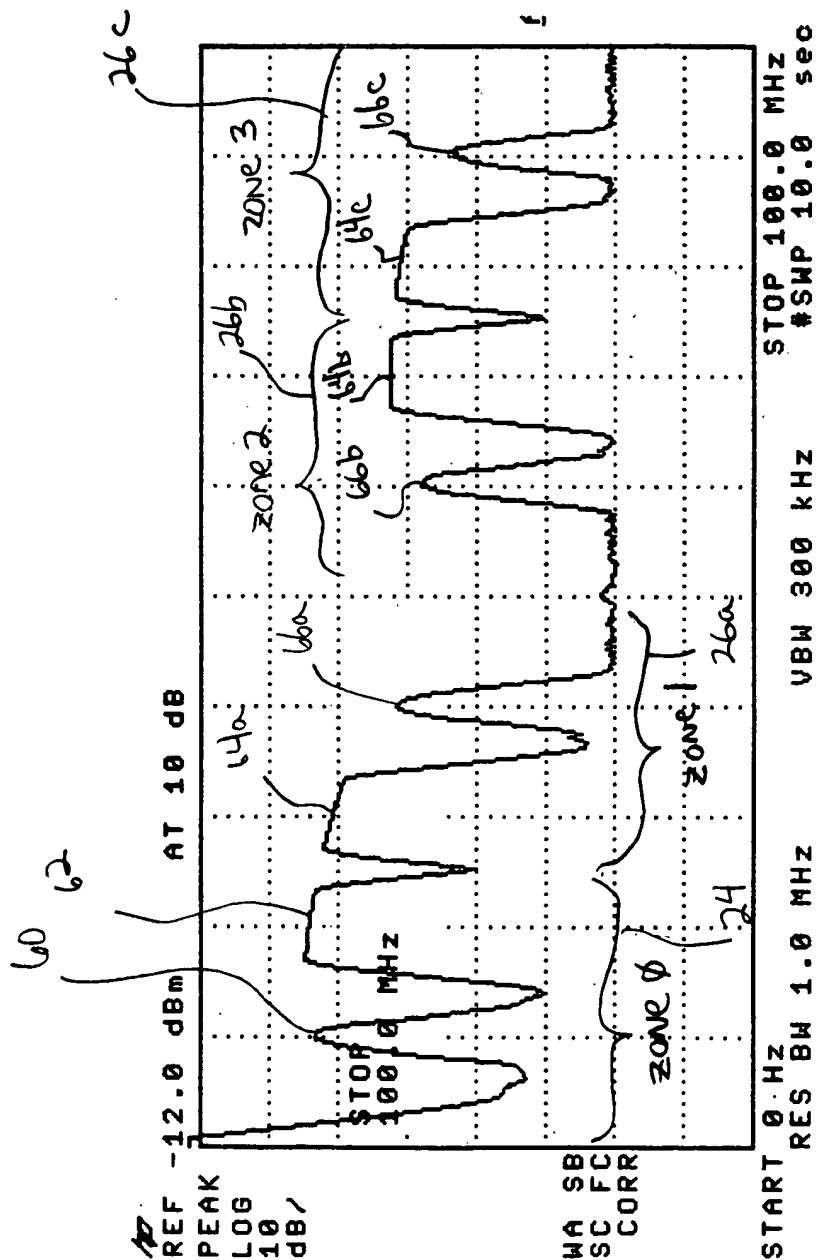


FIG. 5

TOPF20" 2404260

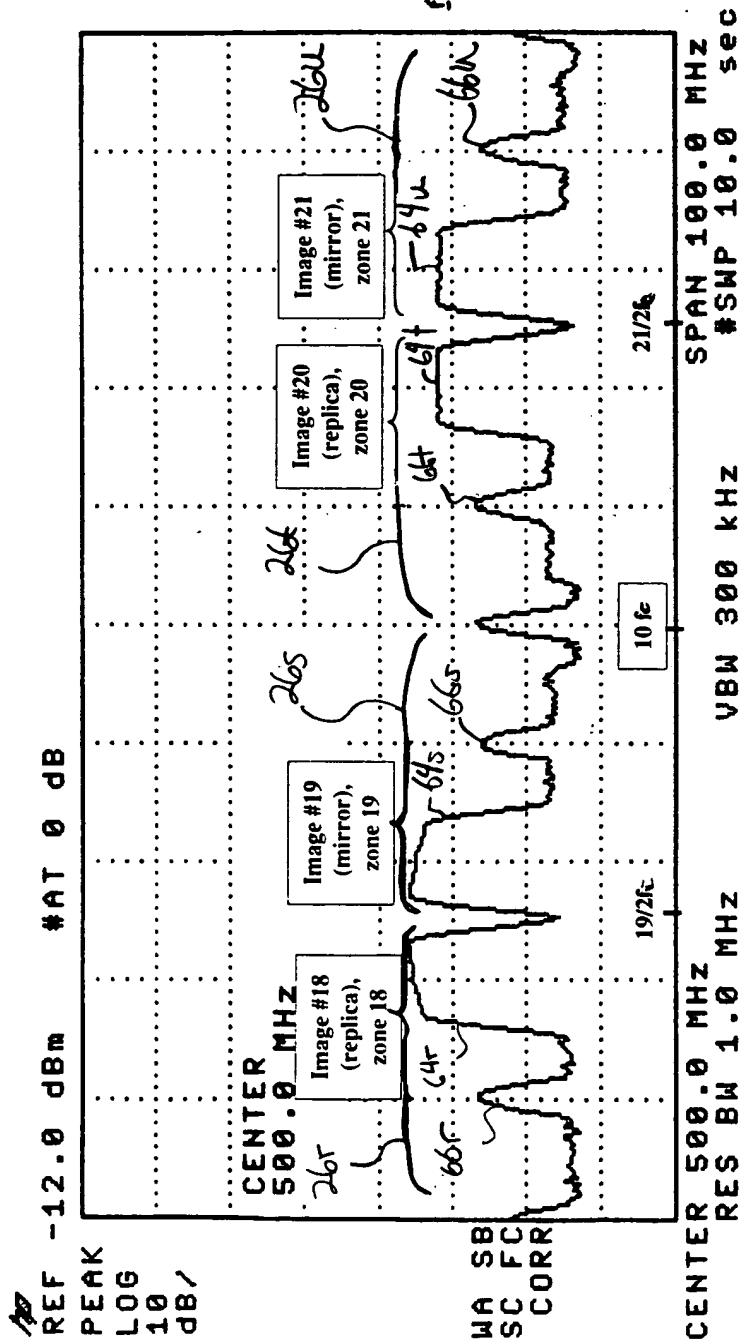


FIG. 6

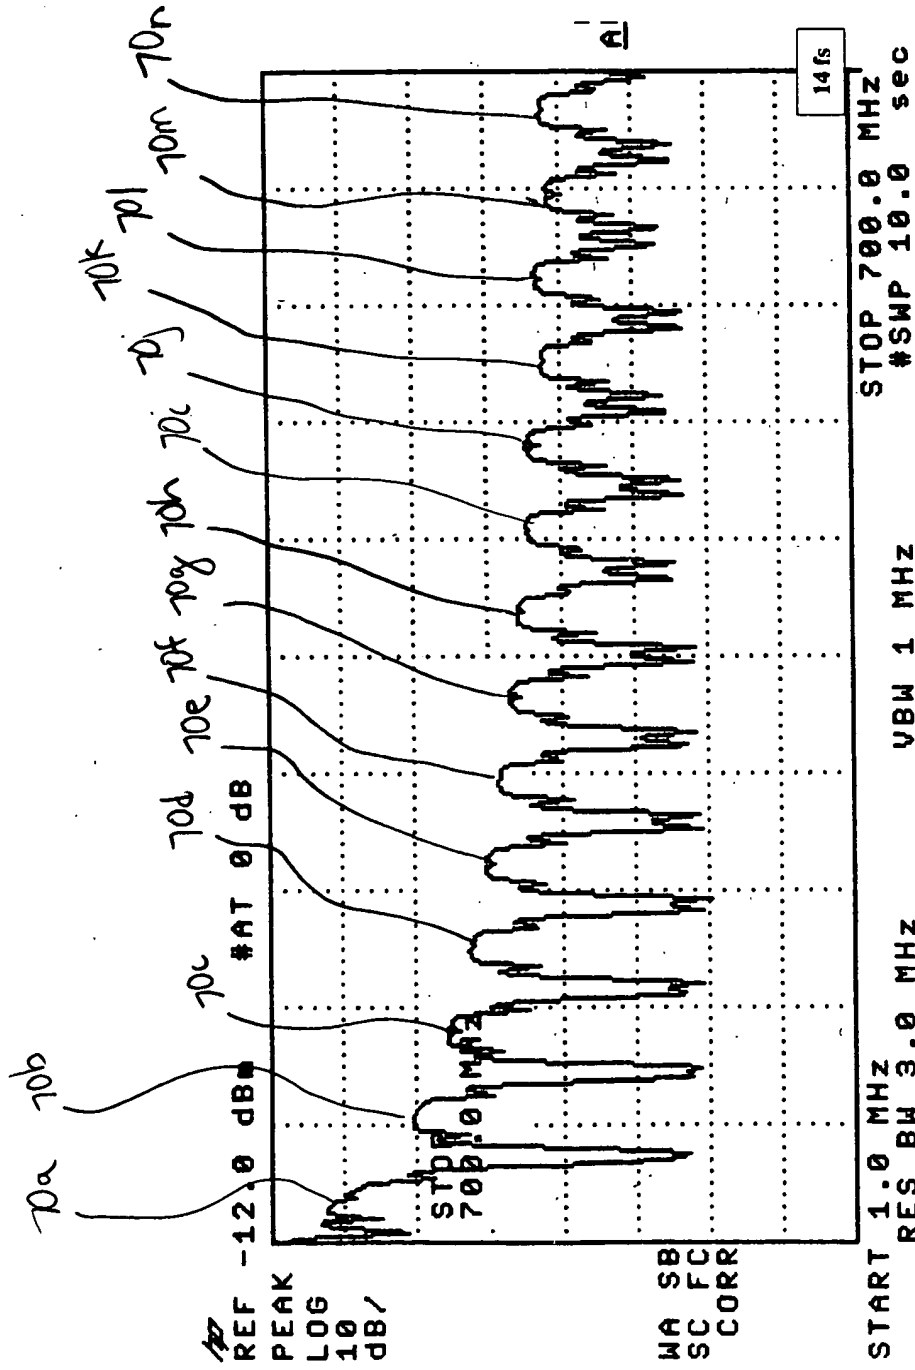


FIG. 7

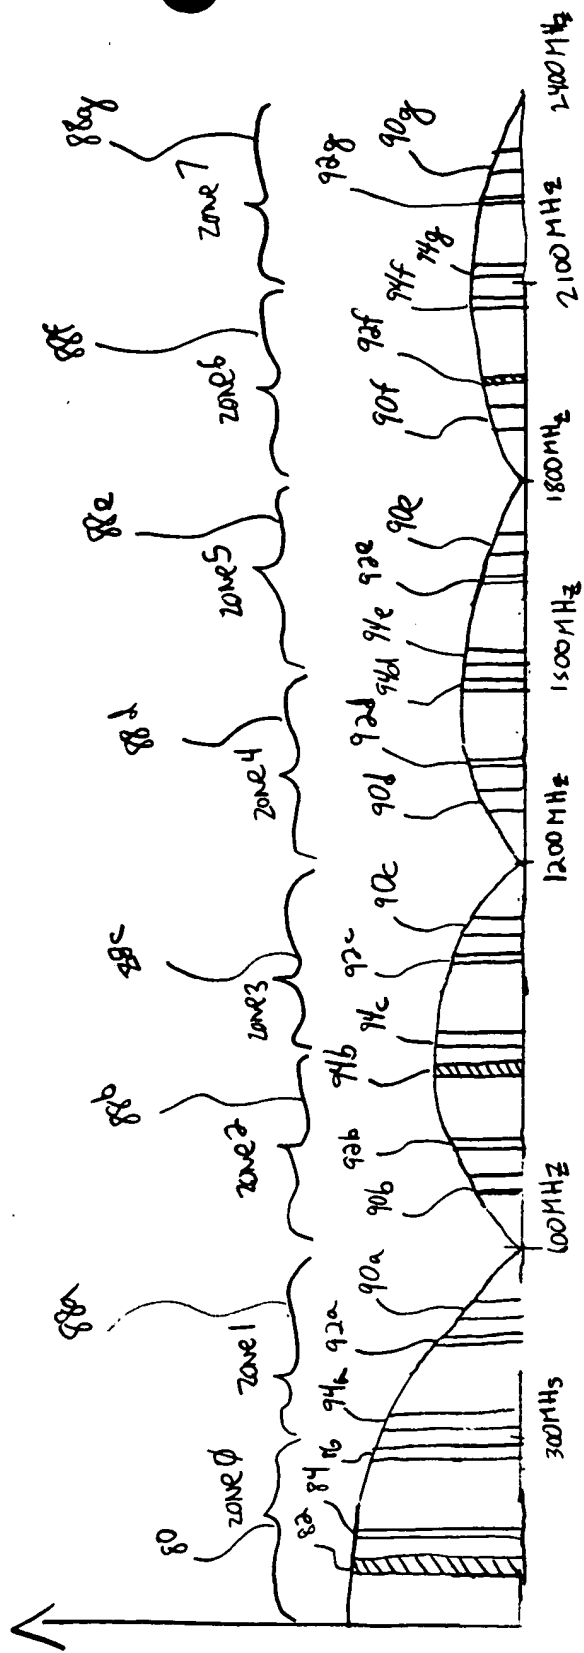


FIG. 8